


# POLYETHYLENE TAPE

Our series of Polyethylene Tapes offer a very aggressive adhesive on a thick water-proof polyethylene film carrier. These tapes are great for sealing and hanging polyethylene sheeting as well as seaming sheets together. It is also a common product for use in vapor barrier installations. Excellent choice for use in isolating dissimilar metals, bundling and protective packaging applications. This tape is great for palletizing heavy loads due to its strength and conformability. Tape is available in assortment of colours and thicknesses. All tapes can be special ordered with a serrated "pinked" edge to aid in easy tearing, even with gloves on. Speak to your sales representative for a cross reference to other company tape products.



Serrated "PINKED" edge available

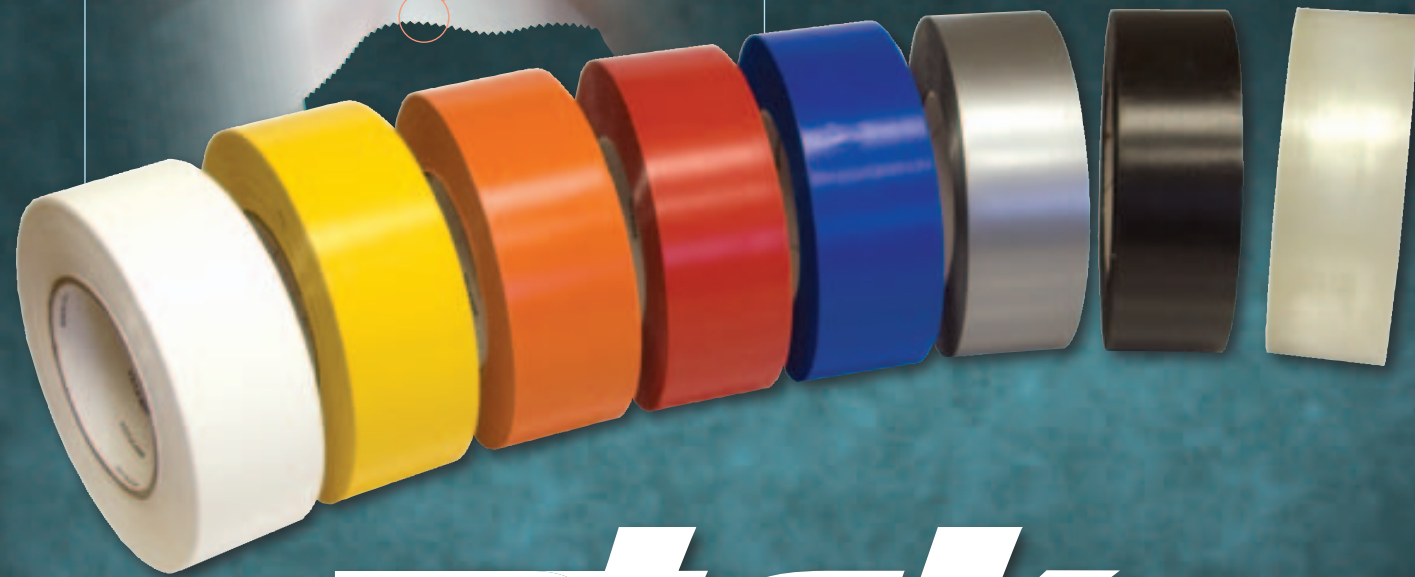

# ptak

POLY TAPES



• Excellent Adhesion • Conformable & Shrinks Around Application  
• Contracting PE Film

• Extremely Durable • Assortment of Colours • Serrated "Pinked" Edge Available

## POLYETHYLENE TAPE

Stock No.	Adhesive Type	Tape Thickness	U.V. Resistance	Applications
PTK33	Synthetic rubber pressure sensitive adhesive. Clear colour, low residue.	4.5 mils polyethylene 3.0 mils adhesive ----- 7.5 mils total tape thickness	No	Bonds well to most surfaces over a wide temperature range. Excellent low temperature bonding. Low residue adhesive.
PTK34	Synthetic rubber pressure sensitive adhesive. Clear colour. Leaves no residue during removal on most surfaces.	4.5 mils polyethylene 2.5 mils adhesive ----- 7.0 mils total tape thickness	Yes	A UV stabilized product offering good outdoor weatherability and a watertight seal. Commonly in Stucco, greenhouse, agricultural and marine shrink wrapping applications.
PTK36	Synthetic rubber pressure sensitive adhesive. Clear colour, low residue.	5.5 mils polyethylene 3.5 mils adhesive ----- 9.0 mils total tape thickness	No	Thick conformable tape with an aggressive tacky adhesive that bonds well over a wide temperature range. Excellent low temperature bonding, while maintaining a weather tight seal.
PTK39	Natural rubber pressure sensitive adhesive. Translucent white colour.	4.5 mils polyethylene 3.0 mils adhesive ----- 7.5 mils total tape thickness	No	Permanent tacky adhesive bonds well to a wide variety of surfaces and performs better than synthetic at low temperature. Highly conformable offering a good watertight seal.